

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

AS9759 REV. A

FEDERAL SUPPLY CLASS
5306

RATIONALE

GENERAL REVISION. REVISE LIGHTENING HOLE CONFIGURATION (ADD SECTION VIEW) TO ALLOW OPTIONAL SHAPE AT BOTTOM OF HOLE, ADD EXCEPTION TO EDGE DISTANCE REQUIREMENTS FOR HEAD MARKING, UPDATE THREAD SPECIFICATION TO AS8879, UPDATE SURFACE FINISH REQUIREMENTS, ADD AS3062 AND DELETE NOTE ON FILLET FOR INCOMPLETE THREAD REQUIREMENTS, ADD DATUM REQUIREMENTS FOR -03 THRU -14 LENGTHS (NEW NOTE 1), UPDATE DIMENSIONING AND TOLERANCING TO ANSI Y14.5M-1982, DELETE .015 MAX RADIUS AT BASE OF WRENCH PAD, DELETE HARDNESS NOTE, AND FIGURE 1 REDRAWN.

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9759, NOTICE 1. THIS SAE STANDARD MAY RETAIN THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPLS HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.


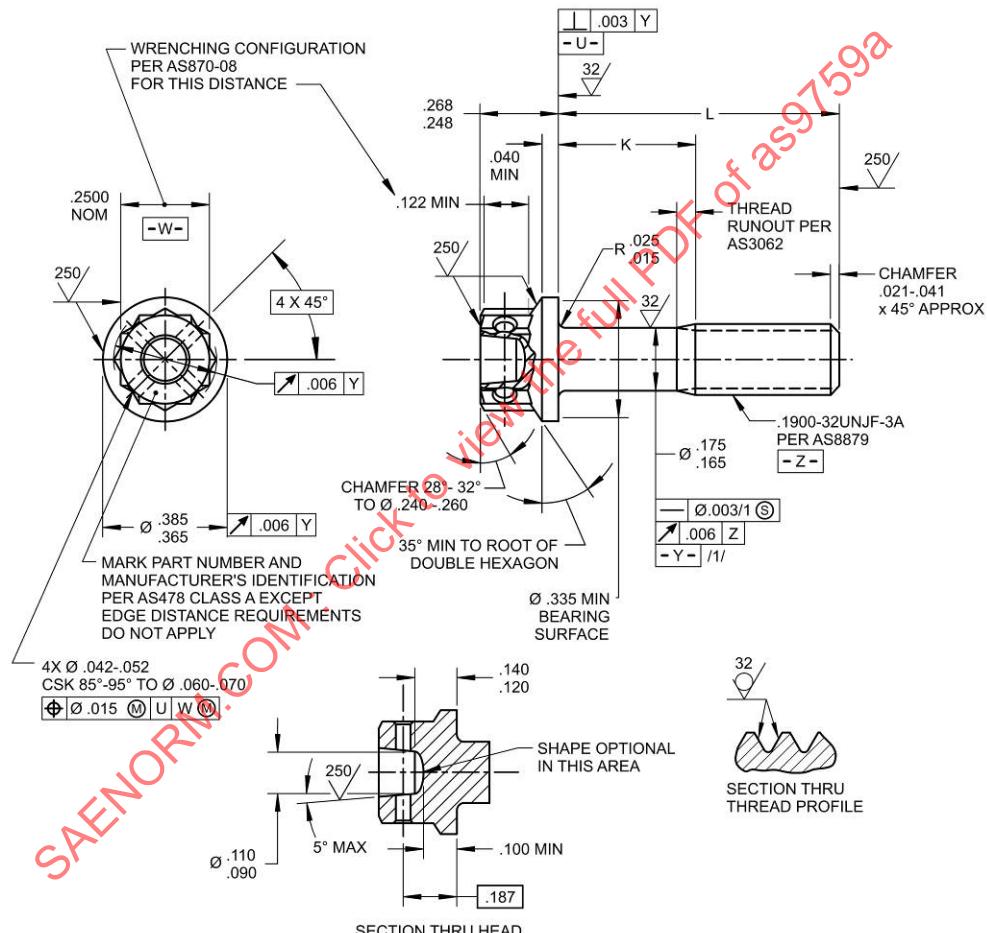


FIGURE 1 - BOLT

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS9759A>



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7461



AEROSPACE STANDARD

BOLT, MACHINE - DOUBLE HEXAGON EXTENDED
WASHER HEAD, DRILLED, PD SHANK,
AMS4967 (TI 6AL-4V), .1900-32 UNJF-3A

AS9759
SHEET 1 OF 2

REV.
A